


CF SERIES High Efficiency Compressed Air Filters

EASY TO INSTALL
EASY TO MONITOR
EASY TO MAINTAIN

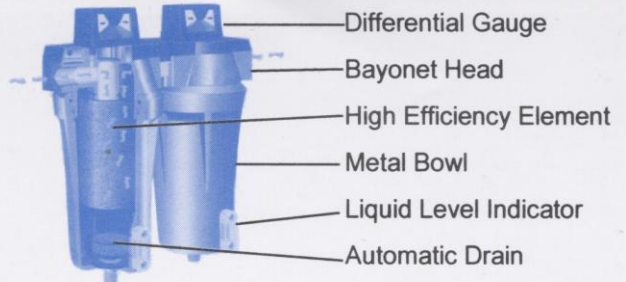

CF 7 SERIES 1 Micron Air Line Filters	Model	Capacity @ 100 psig (scfm)	In/Out Connections	Dimensions		Weight (lb)	Replacement Element	
				H"	W"		No.	Qty.
<p>Two Stage Filtration for removal of liquid water and oil along with solid particles to 1 micron.</p> <p>First Stage – captures larger particles with alternate layers of fiber media and media screen.</p> <p>Second Stage – coalesces aerosols and captures solid particles with multiple layers of epoxy bonded and blended fiber media.</p> <p>(3 micron also available)</p>	CF7-12-3-DPL	20	3/8" NPT	8	4	4.2	CE7-12	1
	CF7-12-4-DPL	20	1/2" NPT	8	4	4.2	CE7-12	1
	CF7-16-3-DPL	35	3/8" NPT	11	4	8.1	CE7-16	1
	CF7-16-4-DPL	35	1/2" NPT	11	4	8.1	CE7-16	1
	CF7-20-3-DPL	60	3/8" NPT	13	4	8.5	CE7-20	1
	CF7-20-4-DPL	60	1/2" NPT	13	4	8.5	CE7-20	1
	CF7-24-6-DGL	100	3/4" NPT	15	5	6.3	CE7-24	1
	CF7-24-8-DGL	100	1" NPT	15	5	6.3	CE7-24	1
	CF7-28-6-DGL	170	3/4" NPT	20	5	6.9	CE7-28	1
	CF7-28-8-DGL	170	1" NPT	20	5	6.9	CE7-28	1
	CF7-32-8-DGL	250	1" NPT	23	6	10.2	CE7-32	1
	CF7-32-12-DGL	250	1.5" NPT	23	6	10.2	CE7-32	1
	CF7-36-8-DGL	375	1" NPT	27	6	11.3	CE7-36	1
	CF7-36-10-DGL	375	1.25" NPT	27	6	11.3	CE7-36	1
	CF7-36-12-DGL	375	1.5" NPT	27	6	11.3	CE7-36	1
CF7-40-16-DG	485	2" NPT	31	8	28	CE7-40	1	
CF7-40-20-DG	485	2.5" NPT	31	8	28	CE7-40	1	
CF7-44-20-DG	625	2.5" NPT	37	8	33	CE7-44	1	
CF7-48-20-DG	780	2.5" NPT	43	8	38	CE7-48	1	

CF 5 SERIES .01 Micron Coalescing Filters	Model	Capacity @ 100 psig (scfm)	In/Out Connections	Dimensions		Weight (lb)	Replacement Element	
				H"	W"		No.	Qty.
<p>Two Stage Filtration for removal of fine liquids and 99.99+% of oil aerosols along with solid particles to .01 micron.</p> <p>First Stage – multiple layers of fiber media and media screen pre-filter air for second stage.</p> <p>Second Stage – fine coalescence is achieved through layers of our special matrix blended fiber media inside a closed cell foam sleeve.</p> <p>(.001 and .008 micron also available)</p>	CF5-12-3-DPL	20	3/8" NPT	8	4	4.2	CE5-12	1
	CF5-12-4-DPL	20	1/2" NPT	8	4	4.2	CE5-12	1
	CF5-16-3-DPL	35	3/8" NPT	11	4	8.1	CE5-16	1
	CF5-16-4-DPL	35	1/2" NPT	11	4	8.1	CE5-16	1
	CF5-20-3-DPL	60	3/8" NPT	13	4	8.5	CE5-20	1
	CF5-20-4-DPL	60	1/2" NPT	13	4	8.5	CE5-20	1
	CF5-24-6-DGL	100	3/4" NPT	15	5	6.3	CE5-24	1
	CF5-24-8-DGL	100	1" NPT	15	5	6.3	CE5-24	1
	CF5-28-6-DGL	170	3/4" NPT	20	5	6.9	CE5-28	1
	CF5-28-8-DGL	170	1" NPT	20	5	6.9	CE5-28	1
	CF5-32-8-DGL	250	1" NPT	23	6	10.2	CE5-32	1
	CF5-32-12-DGL	250	1.5" NPT	23	6	10.2	CE5-32	1
	CF5-36-8-DGL	375	1" NPT	27	6	11.3	CE5-36	1
	CF5-36-10-DGL	375	1.25" NPT	27	6	11.3	CE5-36	1
	CF5-36-12-DGL	375	1.5" NPT	27	6	11.3	CE5-36	1
CF5-40-16-DG	485	2" NPT	31	8	28	CE5-40	1	
CF5-40-20-DG	485	2.5" NPT	31	8	28	CE5-40	1	
CF5-44-20-DG	625	2.5" NPT	37	8	33	CE5-44	1	
CF5-48-20-DG	780	2.5" NPT	43	8	38	CE5-48	1	

OIL VAPOR REMOVAL FILTERS ALSO AVAILABLE IN ABOVE SIZE

CURTIS-TOLEDO, INC. 1905 Kienlen Avenue, St. Louis, Missouri 63133

Website: www.curtistoledo.com Email: info@curtistoledo.com Ph: 314-383-1300 Fax: 314-381-1439
Sales representatives in principal cities

CF-001-A